

BMS 38 - Camprofile Gaskets M20L & M40L - DIN 2691-PN 10 - PN 160)

Issued by:

A D Senior


 (For DIN 2512 Flange Styles)
 Dimensions & Tolerances

Date:

1st Jan 2011

Page:

1 of 1

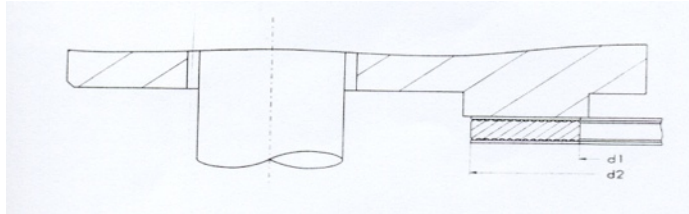

Nominal Pipe Dimension (mm)	d 1 (mm)	d 2 (mm)
4 - 6	20	30
8	22	32
10	24	34
15	29	39
20	36	50
25	43	57
32	51	65
40	61	75
50	73	87
65	95	109
80	106	120
100	129	149
125	155	175
150	183	203
175	213	233
200	239	259
250	292	312
300	343	363
350	395	421
400	447	473
500	549	575
600	649	675
700	751	777
800	856	882
900	961	987
1000	1062	1092

Tolerances:

Diameter tolerance (mm)			
DN (mm)	d1	d 2	d 3
15 - 200	+ / - 0.4	+ / - 0.8	+ / - 0.8
250 - 600	+ / - 0.8	+ 1.5, - 0.8	+ / - 0.8
650 - 850	+ / - 0.8	+ / - 1.5	+ / - 0.8
900 - 1500	+ / - 1.25	+ / - 1.5	+ / - 0.8

Camprofile Thickness = 4.00 + 0 / - 0.25mm or 3.00mm + 0 / - 0.25mm