

BMS 39 - Camprofile Gaskets DIN 2513 Male / Female Flanges

 M20L & M40L According To DIN 2692 (PN10 - PN100)
 Dimensions & Tolerances

Issued by:


A D Senior

Date:

1st Jan 2011

Page:

1 of 1

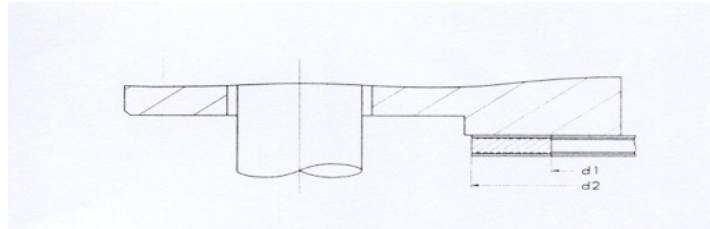

Nominal Pipe Dimension (mm)	d 1 (mm)	d 2 (mm)
10	18	34
15	22	39
20	28	50
25	35	57
32	43	65
40	49	75
50	61	87
65	77	109
80	90	120
100	115	149
125	141	175
150	169	203
175	195	233
200	220	259
250	274	312
300	325	363
350	368	421
400	420	473
500	520	575
600	620	675
700	720	777
800	820	882
900	920	987
1000	1020	1091

Tolerances:

DN (mm)	Diameter tolerance (mm)		
	d1	d 2	d 3
15 - 200	+ / - 0.4	+ / - 0.8	+ / - 0.8
250 - 600	+ / - 0.8	+ 1.5, - 0.8	+ / - 0.8
650 - 850	+ / - 0.8	+ / - 1.5	+ / - 0.8
900 - 1500	+ / - 1.25	+ / - 1.5	+ / - 0.8

Camprofile Thickness = 4.00 + 0 / - 0.25mm or 3.00mm + 0 / - 0.25mm