


BMS 43 - ASME B16.5 Camprofile Gaskets  
M20L & M40L Male / Female Flanges (150-1500LB)  
Dimensions & Tolerances

Issued by: A D Senior  
Date: 1st Jan 2011  
Page: 1 of 1

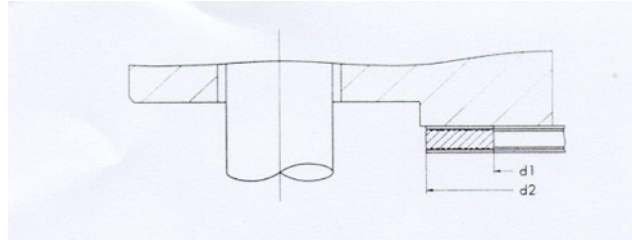

Nominal Pipe Dimension (inch)	d1 (narrow) (mm)	d2 (narrow) (mm)	d1 (wide) (mm)	d2 (wide) (mm)
1/2	<b>Customer to Specify Size</b>	18	21	35
3/4		24	27	43
1		30	33	51
1 1/4		38	42	64
1 1/2		44	48	73
2		57	60	92
2 1/2		68	73	105
3		84	89	127
3 1/2		97	102	140
4		110	114	157
5		137	141	186
6		162	168	216
8		213	219	270
10		267	273	324
12		318	324	381
14		349	356	413
16		400	406	470
18		451	457	535
20		502	510	585
24		603	610	690

Tolerances:

Diameter Tolerance (mm)						
DN (mm)	DN (inch)	DN (inch)	d1	d2	d3	
15	200	1/2"	8	+ / - 0.4	+ / - 0.8	+ / - 0.8
250	600	10	24	+ / - 0.8	+ 1.5, - 0.8	+ / - 0.8
650	850	26	34	+ / - 0.8	+ / - 1.5	+ / - 0.8
900	1500	36	60	+ / - 1.25	+ / - 1.5	+ / - 0.8

Camprofile Thickness = 4.00 + 0 / - 0.25mm or 3.00mm + 0 / - 0.25mm